ELKHART BRASS

SAFE FLEET

Driving Safety Forward™

FROM THE SYSTEM TO THE STREAM



STANDPIPE ESSENTIALS

Model 105A Drain Elbow

- 45 degree design reduces hose kinks
- Built in drain works in any position
- Free swivel inlet allows movement
- Lightweight aluminum, 2.00 lbs (.9 kg)



Model 555A Standpipe Flowmeter

- Accurate digital readout of flow and pressure up to 250 gpm / 250 psi (950 LPM / 17 BAR)
- Rechargeable 9V battery powered
- 5 hours use per charge with low battery indication and standby mode
- Lightweight aluminum, 5.25 lbs (2.4 kg)



Break Aparts

1.5" XD Shutoff with Integrated Smooth Bore & Chief XD FogTip (Shown)

- Shutoff features forged aluminum bale handle and full round ball
- Integrated Smooth Bore Shutoff operates at low pressure and can pass large debris, also ideal for extend operations
- Fog tip available in variety of flow and pressure configurations

*Note: Many options available, above represents most popular nozzle configurations



2" Attack Packages

1.5" XD Shutoff with 188-XD Long Barrel Smooth Bore (Shown)

- Shutoff features forged aluminum bale handle and full round ball
- Tip features protective bumper and laser etched flow rate
- Operates at low tip pressures and can pass through large debris
- Preferred size: 1 1/16" (27 mm) flows 240 gpm (910 LPM) @ 50 psi (3.5 BAR)





Digital Set Up



Analog Set Up

2¼" & 2½" ATTACK PACKAGES

2.5" XD Shutoff with 187-XD Short Barrel Smooth Bore (Shown)

- Shutoff features forged aluminum bale handle and full round ball
- Tip features protective bumper and laser etched flow rate
- Operates at low tip pressures and can pass through large debris
- Preferred size: 1 1/8" (29 mm) flows 265 gpm (1,000 LPM) @ 50 psi (3.5 BAR)



Model 228A Inline Pressure Gauge

- 0-200 psi (0-14 BAR) phosphorescent air filled gauge
- Gauge cover for storing
- Free swivel inlet allows movement
- Lightweight aluminum, 2.85 lbs (1.3 kg)



Model X-86A Gate Valve

- Puts valve control in the hands of the fire attack teams
- Gate style valve function for easy adjustment for proper flow and pressure
- Lightweight aluminum, 5.5 lbs (2.5 kg)



ADAPTERS



111A Increaser

- 1.5" Female x 2.5" Male
- Ideal for extend operations
- Low profile knurling
- Pocket size
- 1.688 inch height



111A2 Increaser

- 1.5" Female x 2.5" Male
- Ideal for extend operations
- Low profile knurling
- Additional space between hose and nozzle
- 2.688 inch hight



101A Reducer

- 2.5" Female x 1.5" Male "Plate" Style Reducer
- Swivel inlet
- Low profile knurling



102A Reducer

- 2.5" Female x 1.5" Male "Bell" Style Reducer
- Swivel inlet
- Low profile knurling

The Elkhart Standpipe Bag

- Custom designed specifically for standpipe operations
- Features several internal and external pockets ideal for door chocks, pipe wrenches, wire brushes, adapters, etc.
- Handles made of seat belt webbing with seat belt buckle fasteners
- Bag made of durable materials

GET THE KIT!

INCLUDES:

(1) Standpipe Bag

17″ L x 9" W x 9" H
(432 mm L x 229 mm W x 229 mm H)

(1) 228A Pressure Gauge

(1) 105A Elbow

(1) X-86A Gate Valve

(2) T-464 Spanner Wrenches



FLOOR BELOW NOZZLE

Specifically designed for fighting fires in high-rise buildings from the floor below at an effective angle and flow rate.




- Built in 2.5" XD Shutoff
- 2.5" Swivel Inlet
- 1.5" Male Outlet
- Blue powder coat paint finish
- 101" (2.57m) long
- Attaching a 1-1/8" tip (sold separately) would allow flows of 265 gpm (1000 LPM) at 50 psi (3.5 BAR)



HORIZONTAL VOID NOZZLE

Designed specifically for fighting challenging fires in horizontal voids such as attic spaces and cocklofts.

Extruded Seamless SCH 40 Aluminum 6061Tube

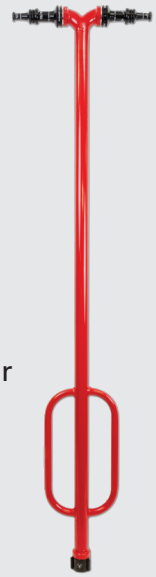

- 1.5" Swivel Inlet
- (2) 1.5" Male Outlets
- Red powder coat paint finish
- 75" (1.91 m) long
- Recommended tip for this appliance is the Model ST-185-XD FDNY Stack with the ½" tip in place (sold separately)

BRASS TACKS HARD FACTS

See Videos at:
www.brasstackshardfacts.com

ELKHART BRASS

031825

Copyright ©2023 Safe Fleet and its subsidiaries. All rights reserved. No part of this publication may be reproduced by any means without written permission from Safe Fleet. The information in this publication is believed to be accurate. However, Safe Fleet does not make any representation or warranty to that effect and does not assume responsibility for any consequences resulting from use of such information. Revisions or new editions of the publication may be issued (or not issued) in our discretion to incorporate such changes.

+1 574.295.8330
elkhartbrass.com

SAFE FLEET
Driving Safety Forward™