

FoamPro Flowmeter

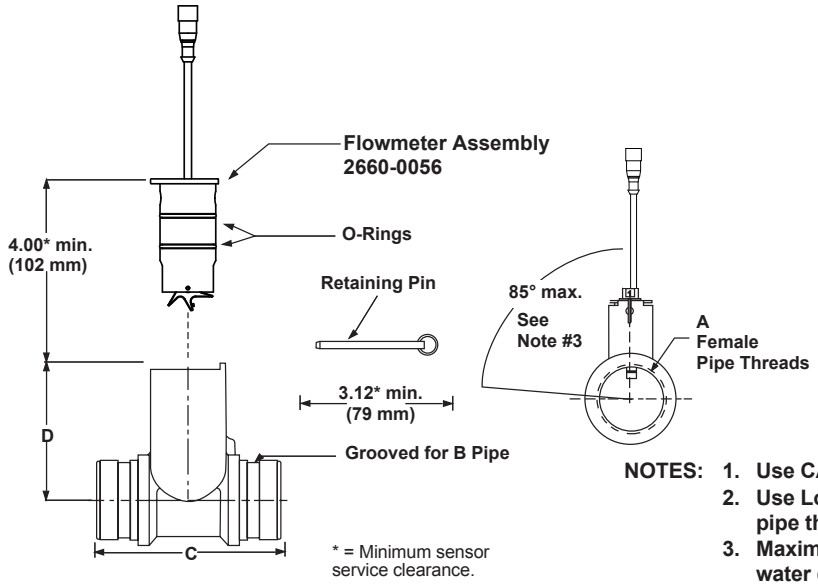

NOTES:
1. **Use CAUTION not to damage sensor during assembly.**
2. **Use Loctite® PST 565 or equivalent Teflon tape to seal pipe threads.**
3. **Maximum horizontal installation angle to allow proper water drainage. Unit may also be installed in vertical piping arrangement.**

Assy. Part Number	A	B	C	D	Maximum Accuracy Flow Range (gpm)	Maximum Operating Flow Range (gpm)
2660-0030	1-1/2''—11-1/2'' NPT NOTE 1'' I.D. Bore	2'' Pipe	7-3/8'' [188 mm]	3-7/8'' [99 mm]	5-110	3-145
2660-0031	1-1/2"—11-1/2" NPT	2" Pipe	5-3/8" [137 mm]	4-1/8" [105 mm]	10-320	3-380
2660-0031B	1-1/2"—11" BSP	2" Pipe	5-3/8" [137 mm]	4-1/8" [105 mm]	10-320	3-380
2660-0032	2"—11-1/2" NPT	2-1/2" Pipe	5-3/8" [137 mm]	4-3/8" [111 mm]	15-520	5-625
2660-0032B	2"—11" BSP	2-1/2" Pipe	5-3/8" [137 mm]	4-3/8" [111 mm]	15-520	5-625
2660-0033	2-1/2"—8" NPT	3" Pipe	5-3/8" [137 mm]	4-9/16" [116 mm]	20-750	8-900
2600-0033B	2-1/2"-11" BSP	3" Pipe	5-3/8" [137 mm]	4-9/16" [116 mm]	20-750	8-900
2660-0034	3"—8" NPT	4" Pipe	5-1/2" [140 mm]	4-7/8" [124 mm]	30-1150	12-1380
2600-0034B	3"—11" BSP	4" Pipe	5-1/2" [140 mm]	4-7/8" [124 mm]	30-1150	12-1380
2600-0035	4"—8" NPT	5" Pipe	5-1/2" [140 mm]	5-3/8" [137mm]	55-1980	20-2380
2660-0035B	4"—11" BSP	5" Pipe	5-1/2" [140 mm]	5-3/8" [137mm]	55-1980	20-2380

FoamPro Manifold

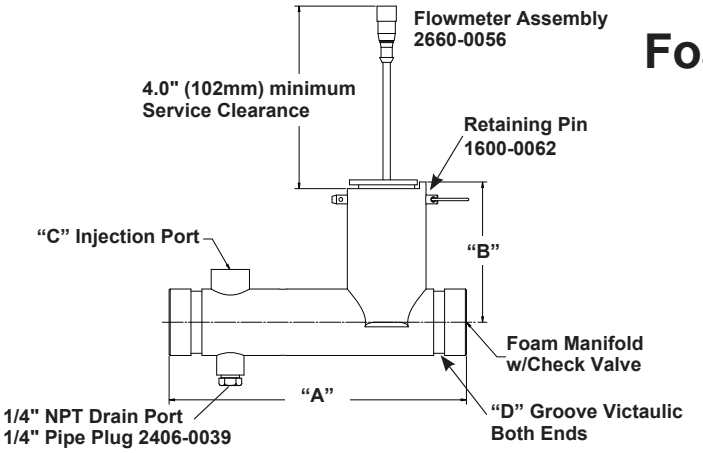

Assy. Part Number	A	B	C	D	Maximum Accuracy Flow Range	Maximum Operating Flow Range
2660-0051	8.5" (216mm)	4.0" (102mm)	1/2" NPT	1-1/2" Pipe	10-320 gpm (38-1211 Lpm)	3-380 gpm (11-1438 Lpm)
2660-0052	8.5" (216mm)	4.3" (109mm)	1/2" NPT	2" Pipe	15-520 gpm (57-1968 Lpm)	5-625 gpm (19-2365 Lpm)
2660-0053	9.5" (241mm)	4.5" (114mm)	3/4" NPT	2-1/2" Pipe	20-750 gpm (76-2840 Lpm)	8-900 gpm (30-3406 Lpm)
2660-0054	9.5" (241mm)	4.8" (122mm)	3/4" NPT	3" Pipe	30-1150 gpm (113-4350 Lpm)	12-1380 gpm (46-5220 Lpm)
2660-0055	11.5" (292mm)	5.2" (132mm	1" NPT	4" Pipe	55-1980 gpm (208-7495 Lpm)	20-2380 gpm (76-9009 Lpm)